

# WAVLINK

see the world

## Quick Start Guide

Wi-Fi 7 BE5100 Dual Band 2.5 Gigabit  
Mesh Router



[kb.wavlink.xyz/docs/Skyline-Stream-5-A/v100/](https://kb.wavlink.xyz/docs/Skyline-Stream-5-A/v100/)


Connect to the Link to View the Detailed  
User Guide



WAVLINK (@WavlinkOfficial)  
WAVLINK SUPPORT (@WavlinkTechSupport)


Skyline Stream 5

## Overview

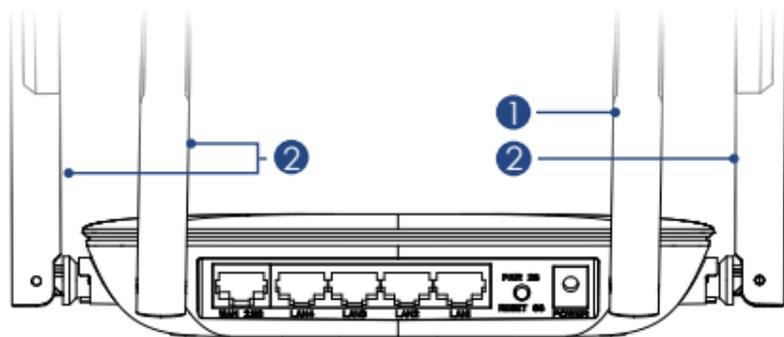

① 2.4G Antenna

② 5G Antenna

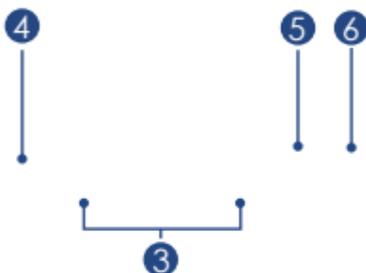

③ 4xGigabit LAN Port

④ 1x2.5 Gigabit WAN Port

⑤ PAIR/RESET

⑥ DC IN

## Basic Info

2.4G SSID: [WAVLINK-Mesh\\_XXXX](#)

5G SSID: [WAVLINK-Mesh\\_XXXX](#)

Default IP: [192.168.20.1](#)

Login: <http://wavlogin.link>

## LED Indication


Mode	LED Status(Blue)	Description
Router Mode	Solid on	The Internet connected
	Fast blinking	No Internet connected
	Slow blinking	In pairing
Repeater Mode	Solid on	The Internet connected
	Slow blinking	Upper router connected but the Internet disconnected
	Fast blinking	Upper router disconnected
AP Mode	Solid on	The Internet connected
	Fast blinking	No Internet connected
	Slow blinking	In pairing

### Note:

Press the RESET/PAIR button for more than **6** seconds then the light is solid on. Press the RESET/PAIR button for **2s**, the LED will be slow blinking.

## Router Mode Wizard


1. Connect this router's WAN port to the Modem's or others' LAN port, then connect the DC IN to the power outlet, turn on this router.

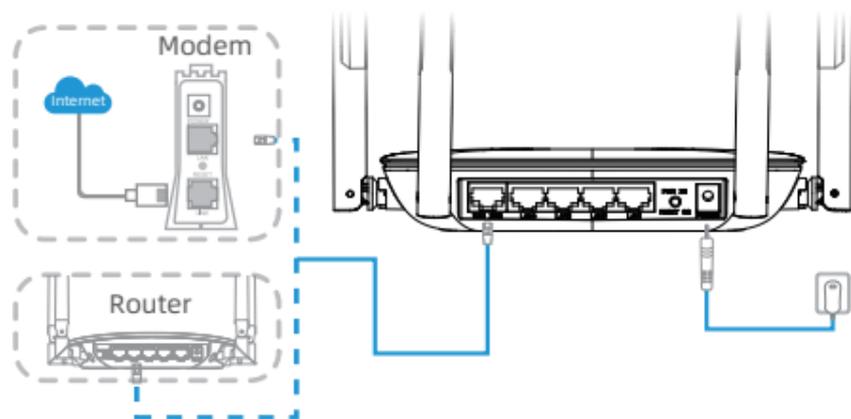

2. Connect your PC/Laptop to the router using the Ethernet cable or WiFi.

### 2.1 Using Ethernet Cable


2.1.1 Turn off the WiFi on your computer, then connect the computer to the LAN port of the router.

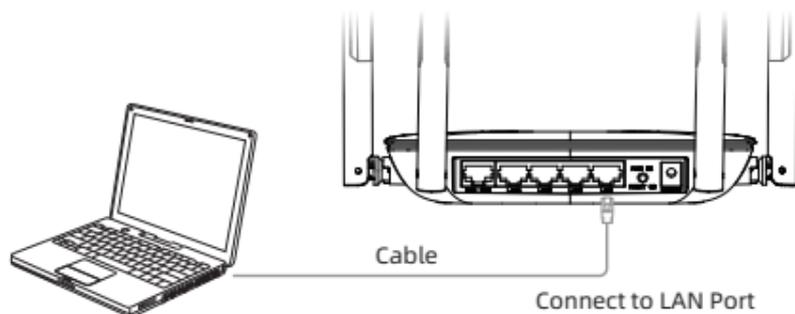


## 2.2 Using Wi-Fi

2.2.1 Find the SSID(Network Name) printed on the label at the bottom of the router.

2.2.2 Click the network icon of your computer or go to Wi-Fi Settings of your computer/phone, and then select the SSID(Network Name) to join the network.

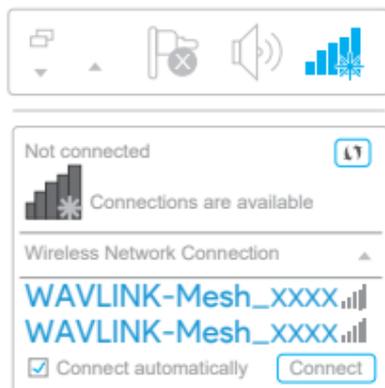

For Windows Users

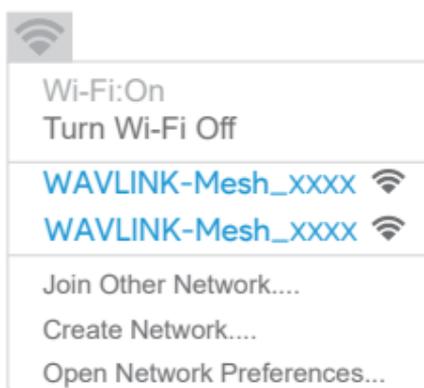

For Mac Users

3. Launch a browser from your computer or smart phone and enter <http://wavlogin.link> in the address field not search bar. Follow the Detailed Guide to finish the configuration.

For the guide of Repeater, AP mode configuration and other functions, please scan the QR code on the cover for the detailed guide.

**Q1. Why doesn't the login page appear after entering <http://wavlogin.link> ?**

- Please make sure your computer is set to obtain an IP address automatically.
- Verify if <http://wavlogin.link> is correctly entered in the web browser.
- Use another web browser and try it again.
- Reboot your router and try it again.

**Q2. What can I do if I cannot access the Internet?**

- Please check if the Internet is working normally by connecting a computer directly to the modem with an Ethernet cable. If it is not, contact your internet service provider.
- Open a web browser, enter <http://wavlogin.link> and run the quick setup again.
- Reboot your router and try again.

**Q3. How can I restore the router to its factory default settings?**

- While the router is powered on, press and hold the RESET button of the back for more than 6 seconds.

**Q4. What can I do if I forget my Administration Management password?**

- Refer to [FAQ > Q3](#) to reset the router.

**Q5. What can I do if I forget my wireless network password?**

- Log in the router's web management page at <http://wavlogin.link> and go to [Wireless](#), you can find your Wi-Fi password here.

**Q6. How to deploy the router to get the best Wi-Fi signal?**

- Keep the router in the most central spot in your home and away from anything that might block its signal.

## GNU General Public License Notice

This product includes software codes developed by the third parties. These software codes are subject to either the GNU General Public License (GPL), Version 2, June 1991 or the GNU Lesser General Public License (LGPL), Version 2.1, February 1999. You can copy, distribute, and/or modify in accordance with the terms and conditions of GPL or LGPL. The source code should be complete, if you want us to provide any additional source code files under GNU General Public License (GPL), please contact us in these matters. We are committed to meeting the requirements of the GNU General Public License (GPL). You are welcome to contact our local office to get the corresponding software and licenses. Please inform us your contact details (full address) and the product code. We will send you a software package with the software and license for free. The respective programs are distributed WITHOUT ANY WARRANTY, without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. Please refer to the GNU General Public License Website for further information.

<http://www.gnu.org/licenses/old-licenses/lgpl-2.0.html>

<http://www.gnu.org/licenses/gpl.html>

### WEEE Directive & Product Disposal



At the end of its serviceable life, this product should not be treated as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

# Need help?

We're here for you!



**Online support: [wavlink.com](http://wavlink.com)**

Available Mon-Fri 8:30 am-5:30pm (UTC+8)



**[support@wavlink.com](mailto:support@wavlink.com)**

Available Mon-Fri 8:30 am-5:30pm (UTC+8)



**+1 8889730883 (US Local)**

Mon-Fri 9:00 am - 10:00 pm (UTC-5)

[www.wavlink.com](http://www.wavlink.com)



**Thank you for purchasing  
WAVLINK product!**